


FD 450



FD 450	VANGUARD Professional B&S	22	656/2	(US Gal.)	17L (4.5)	HYDROSTATIC	450 L	30 cm	25...90 mm (1.2...3.5 in)	113 cm (44 in)	400	H 145 cm D 119 cm W 268 cm

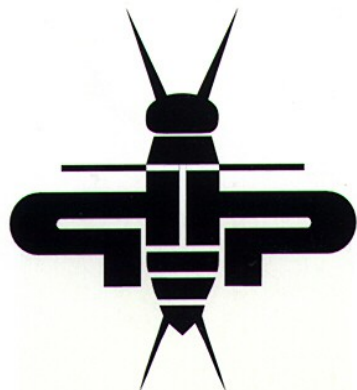

FD 450

HYDROSTATIC LAWN MOWER

Technical data

ENGINE: BRIGGS & STRATTON **22 HP Professional** (16,1 kW @ 3300 r.p.m.) OHV 656 cc twin-cylinder petrol version with oil pump.

STARTER: electric with 12V battery.

GEARBOX: hydrostatic transmission with differential lock.

DIFFERENTIAL LOCK: mechanical with pedal control.

SPEED: 0 – 11km/h (forward) and 0 – 6km/h (reverse) through pedal control device.

FUEL TANK: 17 litres – **REVERSE TANK:** 2,5 litres.

HOURLY CONSUMPTION: 4,6 litres.

CUTTING DECK: frontal with 3 blades for a total width of 1190 mm and equipped with solid wheels.

CUTTING WIDTH: 1130 mm.

ELECTRIC CUTTING HEIGHT ADJUSTEMENT: from 25 to 90 mm.

CLUTCH: electromagnetic for PTO with magnetic blade brake.

DRIVING SYSTEMS: with steering wheel, forward and reverse gears engaged through pedal.

SEAT: with adjustable suspension.

GRASS-CATCHER: 450 litres with full grass catcher motorized micro-switch.

GRASS-CATCHER DISCHARGE AND DECK LIFTING ARE HYDRAULICALLY OPERATED.

DISCHARGE HEIGHT: 150 cm.

TYRES: front: 20×10.0-8; rear: 15×6.0-6.

PARKING BRAKE: disk brake.

STEERING RADIUS: 30 cm.

HOURLY CUTTING CAPACITY: 8000 m²/h (indicative).

INCLUDED IN THE MACHINE: tow bar.

ATTACHMENTS: mulching kit.

SIZE & WEIGHT:

Length: 2680 mm

Width: 1190 mm

Height: 1450 mm

Weight: 385 kg